

# VTO2000A-2

## 2-Wire IP Villa Outdoor Station



### Features

- HD CMOS camera
- Stainless steel panel, IP54,IK07
- Night vision & Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP (VTNC3000A needed)
- Surface mounted & Flush mounted

### Technical Specification

Model	VTO2000A-2
-------	------------

#### System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

#### Video

Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	2.8mm
Angle of View	D:120° H:90°
Day/Night	Color Image

#### Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

#### Operation Mode

Keypad	Single Mechanical Button
--------	--------------------------

#### Interface

Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1

#### Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP



Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Network Protocol	TCP/IP
------------------	--------


#### General

Ingress Protection	IP54, IK07
Tamper Switch	1
Installation	Surface & Flush
Material	Stainless Steel
Power	DC 24V / Supply directly by VTNC3000A
Power Consumption	Standby ≤1W, Work ≤10W
Working Environments	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	129.9mm×32.2mm×140mm
Weight	0.8Kg

Dimensions

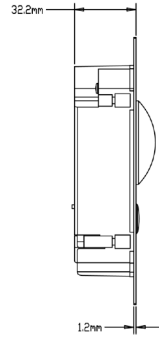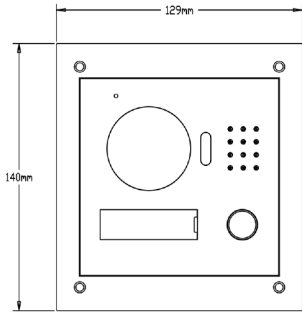

View Area

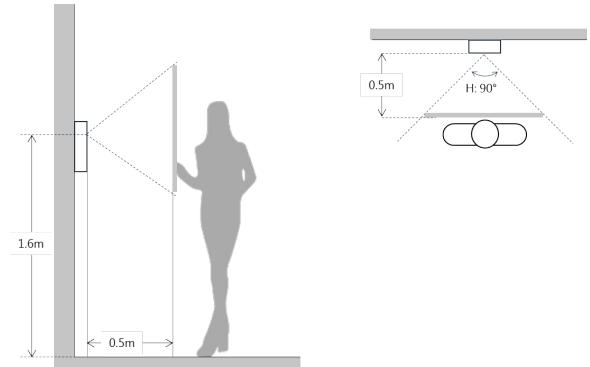

Application

