

DS-KAD706 Two-Wire Video/Audio Distributor

IN	OUT			СН	1 CH	-	-	-	CH5	СН6	
POWER									DS	-KAD7	06
			HII	KVI	5 <i>10</i> /	V			0	RESE	ΞT
	IN	OUT	CH1	CH2	СНЗ	СН4	CH5	CH6		+ -	

Key Feature


- 6 two-wire cascade interfaces, including 1 interface (max. 16 W) used for connecting door station
- 2 cascade interfaces used for cascading DS-KAD706 and DS-KAD706-S
- 8 interface indicators used for displaying network status of interfaces

Specification

Model		DS-KAD706			
	Network interface	1, RJ45 (1-ch reserved terminal and 1- ch for WAN access)			
Interface	2-Wire interface	6-ch for device power supply, including 1-ch for door station power supply with max. output power 16 W			
	Reset	1			
	Signal indicator	8 signal indicators for indicating 6-ch input and output signal			
	Power indicator	1			
	Power supply	24 VDC			
Conorol	Power consumption	< 9 W			
General	Working temperature	-10 °C to 50 °C (14 °F to 122 °F)			
	Working humidity	10% to 90%			






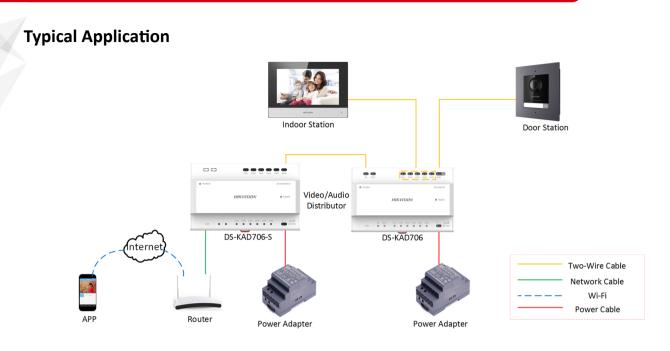

Available Model

DS-KAD706

Physical Interface

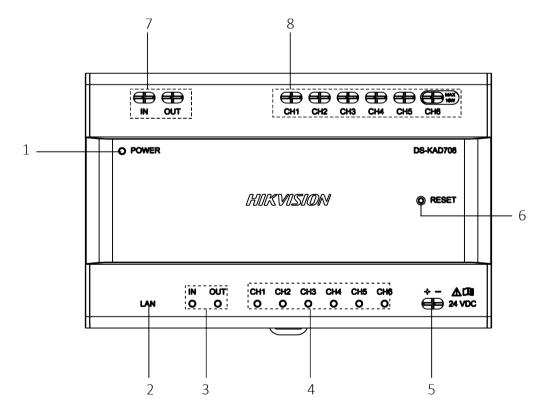

No.	Description	No.	Description
1	Power Indicator	5	Power Input
2	Network Interface	6	Reset Button



No.	Description	No.	Description
3	Cascade Network Indicator	7	Cascade Interface
4	Network Indicator	8	Interface

Distributed by

Г

HIKVISION°

Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com **Hikvision Russia** T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2018 | Data subject to change without notice |